

References			Dimensions (mm)	Opening (mm)	Levels	L (mm)	W (mm)	H (mm)	e (mm)	A (mm)	B (mm)	Weight (kg)
polyamid cover	stainless steel cover	closing bar										
804 155	834 155	844 155	400 x 600	400	9	725	539	900	70	417	355	17
804 156	834 156	844 156	400 x 600	400	12	725	539	1785	125	417	355	19
804 157	834 157	844 157	400 x 600	400	16	725	539	1785	94	417	355	21
804 158	834 158	844 158	600 x 400	600	16	525	732	1785	94	610	548	20
804 159	834 159	844 159	400 x 600	400	20	725	539	1785	75	417	355	23
804 160	834 160	844 160	600 x 400	600	20	525	732	1785	75	610	548	19
804 161	834 161	844 161	400 x 800	400	20	925	539	1785	75	417	355	27
804 162	834 162	844 162	600 x 800	600	16	925	732	1785	94	610	548	25
804 163	834 163	844 163	600 x 800	600	20	925	732	1785	75	610	548	27



trolley height 725 mm + closing bar

TECHNICAL SPECIFICATIONS :

- Food quality stainless steel construction.

Tube structure :

- Uprights 25 x 25 mm section stainless steel tube, thickness 1,2 mm.
- 1 intermediate spacer, stainless steel tube, section 20 x 20 mm, thickness 1,2 mm on all trolleys and 2 spacers on 600 x 800 mm trolley.

Slide bars :

- Made of bright polished sheet: 1,2 mm thick.
- Continuous argon welds with no added metal.
- L-shaped with runner stops at each end.


Wheels :

- 4 swivel Ø 125 mm.
- Annular bumpers.
- Rubber tyre, non-marking type.

Maximum load: 20 kg per level, maximum 200 kg.

Top shelf 1,5 mm stainless steel sheet on trolley with levels.

Made to request : Trolleys with closing bar on trolley for transport in a vehicle.

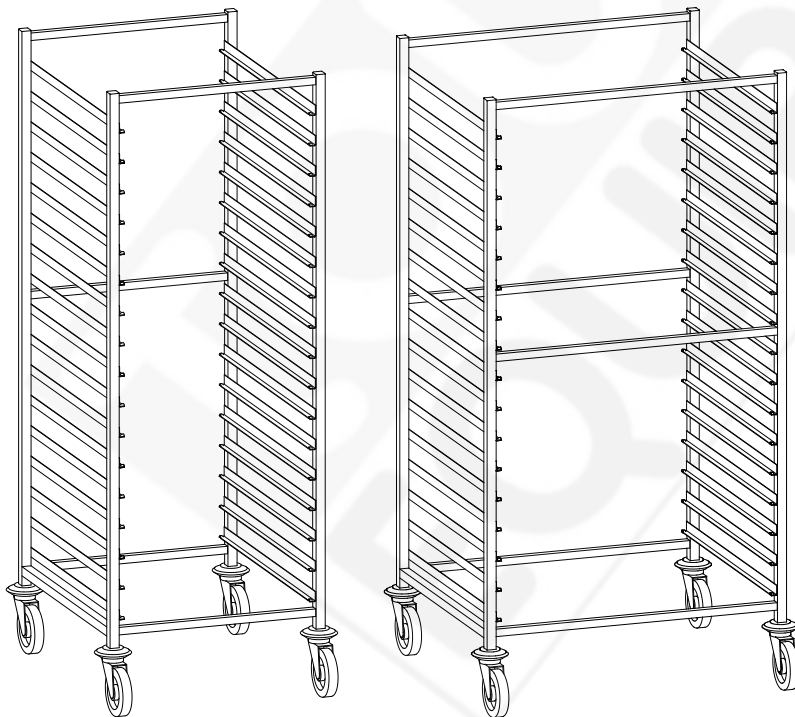

trolley 600 x 800 mm

