

STACKING GASTRONORM SLIDE BAR TROLLEYS



GENERALS CHARACTERISTICS

Made of food quality stainless steel with a chromium content more than 17,5%.

TUBE STRUCTURE:

- Uprights 25 x 25 mm section stainless steel tube, thickness 12/10 mm.
- Diagonal spacers, section 25 x 25 mm.

SLIDE BARS:

- Bright stainless steel sheet thickness 12/10 mm.
- Continuous argon welds with no added metal.
- L-shaped with runner stops at each end.

WHEELS:

- 4 swivel wheels Ø125 mm, of which 2 with brakes, non marking tyre.
- Annular wheel guards.

END OF SERVICE LIFE:



- WEEE recycling channel - Syneg.
- Environmental specifications sheet available on request.

MADE TO REQUEST:


- Trolley with closing bar for transport in a vehicle.

Maximum load: 20 kg per level, maximum 200 kg.

Description	levels	L (mm)	w (mm)	H (mm)	d (mm)	A (mm)	B (mm)	weight (kg)	References		
									polyamid cover	verticale secure bars	stainless steel cover
Stackable GN1/1	20	653	454	1785	77	332	304	20	804 229	844 229	834 229
Stackable GN2/1	20	773	654	1785	77	532	504	26	804 259	844 259	834 259

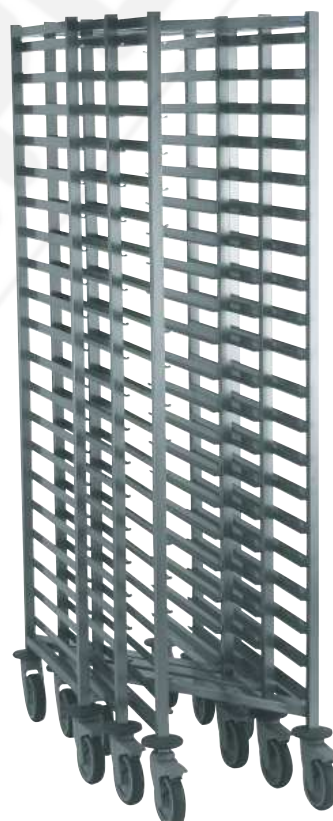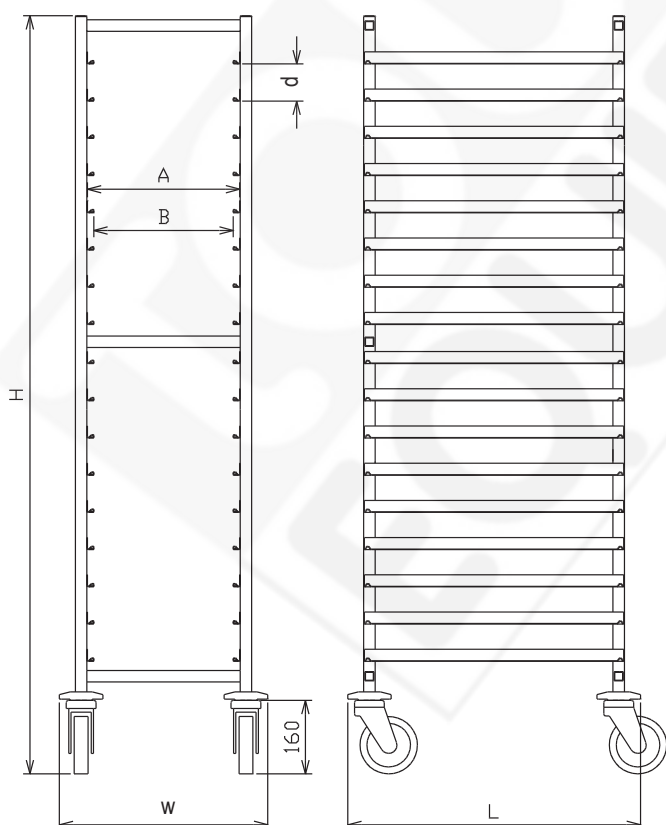

stacking method
(seen from above)



verticale secure bars

